

Studio Due

emotion and creativity in light



Archi¹⁵⁰bar

The ARCHIBAR 150 RGBW is a leading edge super high power LED bar for outdoor use.

IP66 rated and therefore suitable for external architectural applications. Full remote DMX control for RGBW, to allow endless colour mixing possibilities.

Unlimited colour palette that can enhance the illumination of facades for endless architectural applications.

Particularly suitable for applications like commercial malls, exhibition centres, historical sites and generally for facades..

TECHNICAL FEATURES

• SOURCE

n. 64 (4x5W) LEDs
16 groups each one with four LEDs (RGBW)
5900 total lm (lm: 2200 W, 1100 R, 2100 G, 500 B)
120W total light power

• OPTIC

25mm quad lenses 23°
On request:
- 10° quad lenses
- 40° quad lenses

• TILT Manual 120°

• CONTROL

Standard interface: RS-485, optocoupled input
Protocol: USITT DMX512

• CONNECTIONS

Signal: 4pin IP 67 Amphenol connector (male-female)
Main Power: 3x1mm cable

• SETUP AND CONFIGURATION

Inside with microswitches
Internal preset with MASTER/SLAVE function

• RATING PROTECTION

IP 66

• DMX CHANNELS

- 9CH mode

• POWER SUPPLY

Switching power supply (universal main voltage)
Rated voltage: 100-240V~; 50-60Hz
Rated power: 140W
Rated current: 0,7A @ 230V

• PHYSICAL

WxDxH: 1010x87x68mm (dimension of profile)
Weight: 8,5 Kg.




Click on the QR Code
with your smartphone
to go directly to the
fixture website page

Studio Due

emotion and creativity in light

PHYSICAL

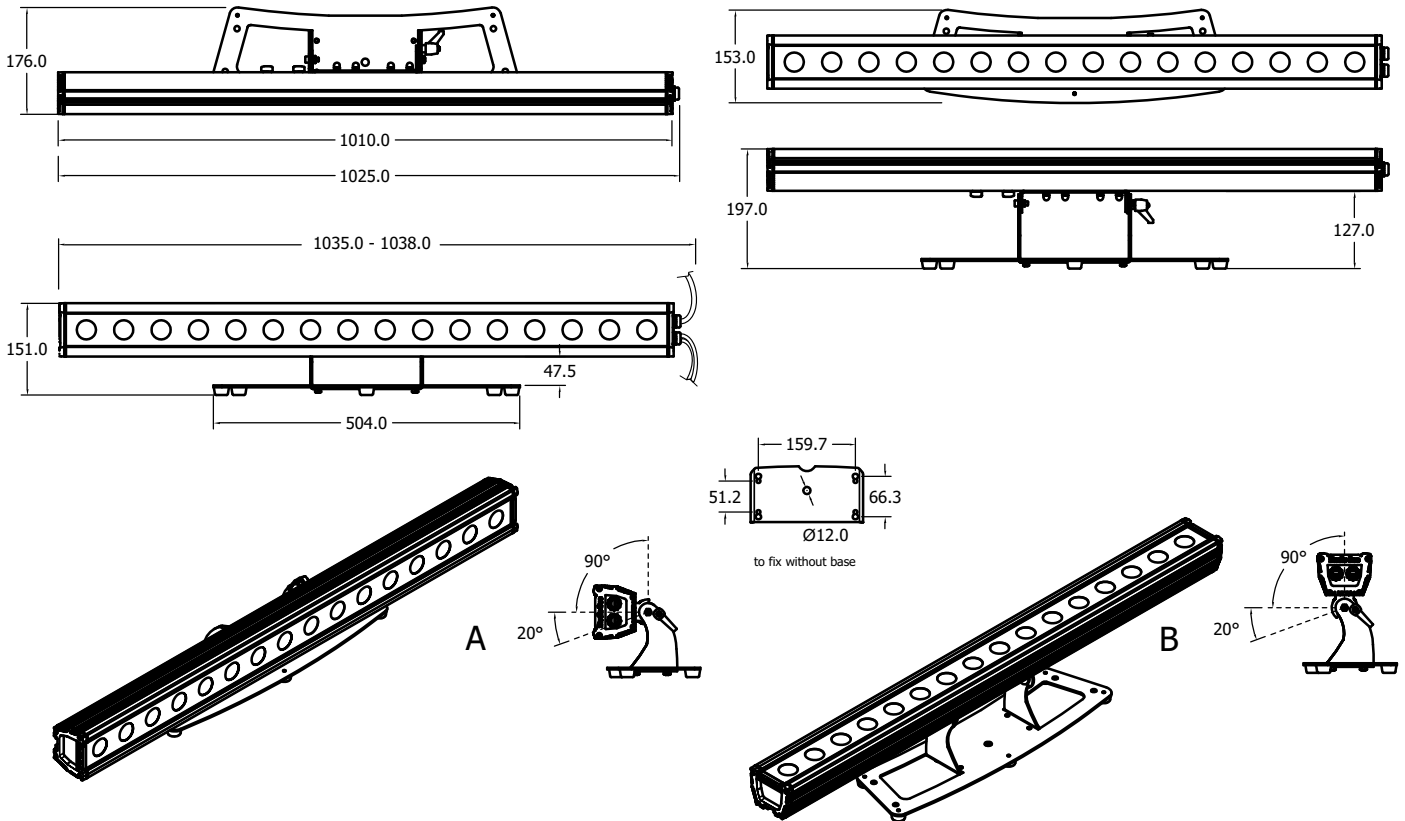

© Copyright 2014 Studio Due light srl
Strada Poggino, 100
01100 Viterbo (Italy)
tel. +39.0761.352520 (4 lines)
fax +39.0761.352653
C.F. e P. IVA 05793121004

Specifications are subject to change without notice. Trademarks are the property of Studio Due Light Srl
www.studiodue.com