



SPLITTER 2 exit

OPTO-ISOLATED DMX AMPLIFIES/BOOST

This series of DMX Splitter has 1 INPUT and 2 OUTPUT (3pin and 5pin). Absolute isolation between the INPUT and OUTPUT or between the OUTPUT and OUTPUT

SPECIFICATION

- Duplication IN/OUT XLR3 and XLR5 connector
- Regeneration and amplification of the DMX signal
- N.1 DMX thru amplified
- N.2 output signal opto-isolated from the input signal


- World wide power supply range (100-240VAC)
- Absorption 4W max
- Line protections on the signal and on the main

- IP rate: IP20
- Temperature range: -20°C..+45°C

- PHYSICAL
WxDxH: 323x98x44mm

PHYSICAL

www.studiodue.com

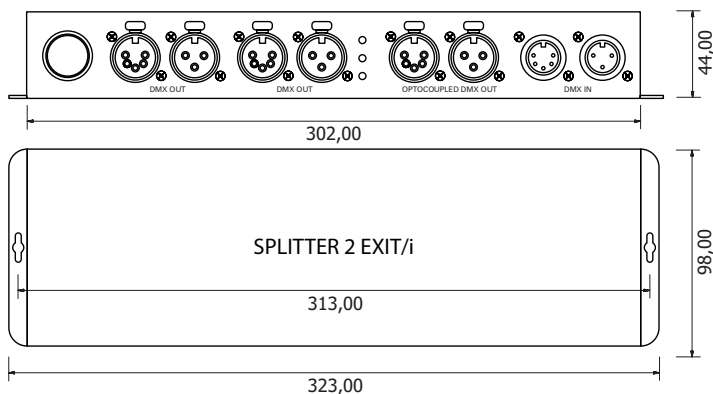

Studio Due light s.r.l.

Doc. 5001-2e/i - 08/19
SPLITTER 2e/i

CE 08/19

Dichiarazione CE di conformità

Declaration CE of conformity

La ditta: STUDIO DUE light s.r.l.
The firm: Strada Poggino, 100
01100 VITERBO
ITALY

dichiara sotto la propria responsabilità che il prodotto:
declare under our sole responsibility that the product:

SPLITTER 2 EXIT
code: 5001-2e / i

è conforme alle norme: CE
is in conformity with the standard: CE

Safety:

(by Low Voltage Directive 2006/95/EC)

EN60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011

Electromagnetic Compatibility:

(by Council Directive 2004/108/EC)

EN55022: 2006 + A1: 2007

EN 55024: 1998 + A1: 2001 + A2: 2003

EN6100-3-2: 2006 + A2: 2009

EN6100-3-3: 2008

Data di apposizione CE : 19
Date of CE marking : 19

VITERBO, 02/08/19

PAOLO SENSI
General Manager

